

ED225MPC-3L/4L-N1

CALL FOR PRICE

Quantity Discounts
AVAILABLE



PC/PLC Controlled / Photo-Eye
Pushbutton (Optional)



ED225MPC-4L-N1*

* Scrolling Message Optional

Case Size: 42" x 16" ** x 2.0"

** Four Lines

What's in the Box:

- Bright **2.25" High** LED Display with Four Digits / Five Digits in the Bottom Line ("- Sign)
- 2 Lines of Numerics / Bottom Line is a Scrolling Message Sign
- Top Line Counts Up or is Fixed / 2nd Line Upcounts / 3rd Line Calculates the Difference
- Customer-Designed Lettering (White, Vinyl)
- Mounting Brackets
- Complete Instructions (Download a .pdf)
- Factory Service One-Year Warranty on Parts and Labor
- Unlimited Technical Phone Support

Operation: The top line is set as a fixed number or advance by a specified value at a specified time (count by one every 10 seconds).



The middle line advances by one for every contact closure. Inputs can be a momentary switch, photo-eye, PLC, etc.

The third line internally calculates the difference. The customer can define lettering, number of digits and lines and operation.

The bottom line is an optional 16 character moving sign that scrolls pre-programmed messages.

Ideal to show employees production status and improve efficiency.


Network Communication: An Ethernet card option is available with these scoreboard displays that will easily add it to an existing network. Each display can be given an individual IP address and then accessed from anywhere in the plant.

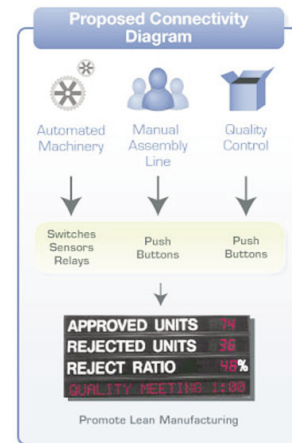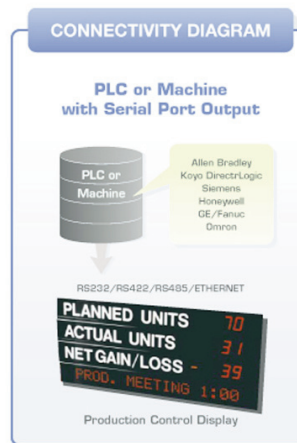

IMPROVE

- Efficiency
- Quality
- Cost Savings
- Production
- Employee Motivation

Lean Production Scoreboards to Get Results!
PC Software Program Included

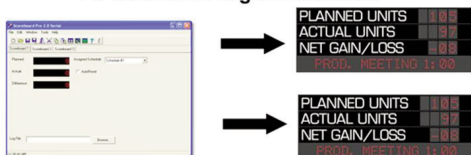

Ethernet Capability - Communicate to Multiple Displays

MONITOR

- Production Hours
- Line Speed
- Line- Down Time
- Loading / Unloading Time

Electronic Displays, Inc.

EDI
Specialists in Information Displays

Ideal to:

- Measure OEE (Overall Equipment Effectiveness). This frequently used metric is used to monitor and improve efficiency leading to reduced costs and increased profits.
- Improve communication between employees and management.
- Reach maximum performance and efficiency.
- Increase productivity and boost employee performance.

Applications

EDI has worked with companies in many industries including **automotive, food processing, packaging, printing and many more.** Any place where displaying real-time information to improve production and efficiency is critical.



DOL. 1	24%
DOL. 2	37%
CHA. 1	24%
CHA. 2	24%

DATE	12-12-12	12-14
01 FLOW LINE	21	431 1109
03 COMPLEX	6	59 919
04 STORAGE CASE	14	21 171
01 PEDS	12	639 904
BALANCE DUE	63	1209 2492
DAYS W/INJURIES		
RELIABILITY	12-12	97.90%
		CONGRATUL

P/M PRESSED PIECES	
MONTHLY GOAL	4200
BALANCE DUE	600
DAYS REMAINING	12
WEEKLY GOAL	1050
BALANCE DUE	150

Lower Granite Project	
Currently Generating	1234567890 MWs
Provides Power for Approx.	2345678901 Homes
Year to Date Generation	3456789012 MWs
Year to Date Approx. Value	4567890123 Dollars
Lower Granite Yearly Budget Approx.	5678901234 Dollars
Juvenile Fish Transported	6789012345 Fish
Year to Date Lockages	7890123456 Times
Days Without a Lost Time Accident	8901234567 Days
Previous Record	9087654321 Days
10: Address = 1, Length = 40, Baud = 120K	

Electrical Specifications

Power Source
Power Consumption
Current Draw
Activation Voltage
Supplied On-Board Voltage
Power Cord Length

120 Volts AC / 60 Hz.
Max. 25 Watts (All LEDS On)
Typical 500 mA per Field
5 to 24VDC @ 15 mA source current-active high or low
12 VDC @ 15 mA isolated power supply
6 Foot Business Plug

Physical Specifications

Indoor / Outdoor
Operating Environment
Dimensions
Weight
Number of Digits

Character Height
Viewing Distance
LED Color / Acrylic Face

LED Intensity

U.L. Listed Power Supply
Enclosure Color / Material
Enclosure NEMA Rating

Mounting Method

Limited Warranty

Designed to be Installed and Viewed Indoors
32° to 120° F (0° to 49°C) / 0 to 95% Humidity
42" L x 16.0" H (w/message sign) x 2.25" D
Approx. 35 Lbs. (w/scrolling sign)
Four (4) Digits on the Top Two Lines /
Five Digits on the Bottom Line For "-" Sign
2.25" High Numbers
80 - 100 Feet
Bright Red Standard
Green/Amber - Optional: Call For Details
Bright 10 MCD High-Intensity Digits

Yes
Black Extruded Aluminum
NEMA1 Rated- Standard
NEMA12 Rated - Optional
Two Mounting Brackets Provided
Mounting Method Examples (.pdf)
Factory Service One-Year Parts & Labor

Electronic Displays, Inc.



135 S. Church Street • Addison, IL 60101

Phone: 630-628-0658 • Toll-Free: 800-367-6056 • Fax: 630-628-0936

www.electronicdisplays.com

PROUDLY MADE IN THE U.S.A.