

ELECTRONIC DISPLAYS INC.


135 S. CHURCH STREET
ADDISON, ILL. 60101

www.electronicdisplays.com



ED400MSC-E-2F-N4

This display will increment by “1” every 24 hours automatically with the option to “hold” a number so it will not increment. Each LED field is independently programmed. There are two USB devices in the remote enclosure. Each USB device controls an LED field.

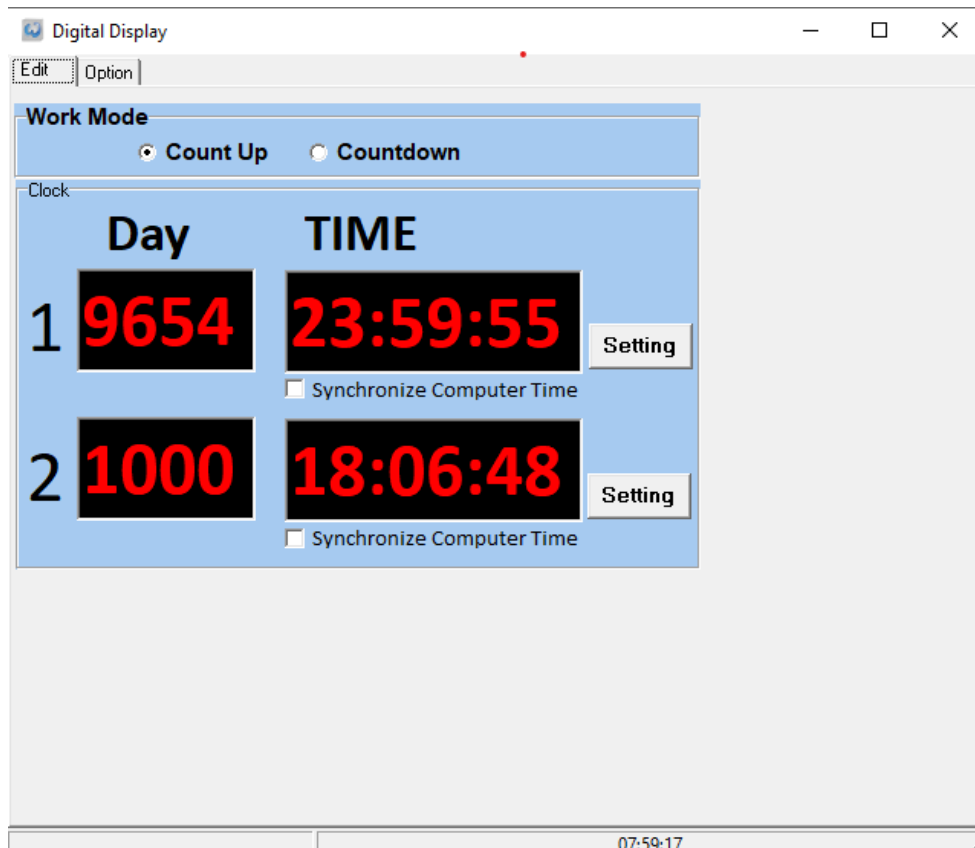

To configure the display using the PC software follow these instructions:

1. Plug the USB device into a PC.
2. Open the **Day Count** software
3. Confirm the COM port
4. Select "**OPTION**" tab on the software.
5. Select the appropriate com port (check your "Device Manager" under "Com Ports")
6. Click "**Set**".
7. Select the "**Edit**" tab
8. Confirm the "Work Mode" is on "**Count Up**"
9. Click the "Synchronize Computer Time" to send the PC time to the display field
10. Enter a number in the "**Day**" field to preset the display to a number to start incrementing from.
11. Click the "Setting" button.
12. The LED field will display the number and start incrementing by "1" from that value.
13. To preset a time to start incrementing from, turn off "Synchronize Computer Time"
14. Enter the time to start incrementing in the "**TIME**" field. For example: to start the 24-hour timing at 6:00 AM (**24-hour format**)
 - a. Set hours to 06
 - b. Set minutes to 00
 - c. Set seconds to 00
15. Click the "Setting" button

Please visit our website for more information: www.electronicdisplays.com
Or Call: 1-800-367-6056 / Our Support Website: <http://edisupport.helpserve.com/>